



60 kvar Capacitor duty contactor 1NO + 2NC aux contact 240 V AC, 50/60 Hz coil

product brand name	SINOVA
product designation	Capacitor contactor
product type designation	3MT7
General technical data	
size of contactor	6
product extension auxiliary switch	No
insulation voltage	
• of main circuit with degree of pollution 3 rated value	690 V
• of auxiliary circuit with degree of pollution 3 rated value	690 V
protection class IP	
• on the front	IP20
• of the terminal	IP00
mechanical service life (operating cycles)	
• of the contactor with added auxiliary switch block typical	100 000
electrical endurance (operating cycles)	100 000
reference code according to IEC 81346-2	Q
Net Weight	1.56 kg
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
• during operation	-5 ... +40 °C
• during storage	-60 ... +80 °C
Main circuit	
number of poles	3
number of NO contacts for main contacts	3
number of NC contacts for main contacts	0
operational current	
• at AC-6b at 440 V at ambient temperature 40 °C rated value	92 A
operating reactive power	
• at 240 V at 50 Hz 3 phase at ambient temperature 40 °C rated value	38 kvar
• at 400/415 V at 50 Hz 3 phase at ambient temperature 40 °C rated value	60 kvar
• at 440 V at 50/60 Hz 3 phase at ambient temperature 40 °C rated value	70 kvar
• at 600 V at 60 Hz 3 phase at ambient temperature 40 °C rated value	75 kvar
no-load switching frequency	
• at AC	1 800 1/h

operating frequency at AC-6b	
• at 240 V maximum	100 1/h
• at 400 V maximum	100 1/h
Control circuit/ Control	
type of voltage	AC
type of voltage of the control supply voltage	AC
control supply voltage at AC	
• at 50 Hz rated value	240 V
• at 50 Hz rated value	240 V
• at 60 Hz rated value	240 V
• at 60 Hz rated value	240 V
control supply voltage frequency	
• 1 rated value	50 Hz
• 2 rated value	60 Hz
operating range factor control supply voltage rated value of magnet coil at AC	
• at 50 Hz	0.85 ... 1.1
• at 60 Hz	0.85 ... 1.1
apparent pick-up power of magnet coil at AC	250 VA
apparent holding power of magnet coil at AC	37 VA
closing delay at AC	14 ... 25 ms
opening delay at AC	4 ... 15 ms
arcing time	4 ... 15 ms
Auxiliary circuit	
number of NC contacts for auxiliary contacts	2
• attachable	0
• instantaneous contact	2
number of NO contacts for auxiliary contacts	1
• attachable	0
• instantaneous contact	1
operational current of auxiliary contacts at AC-15	
• at 230 V	2.09 A
• at 400 V	1.25 A
operational current of auxiliary contacts at DC-13	
• at 24 V	5 A
• at 110 V	0.59 A
• at 125 V	0.59 A
• at 220 V	0.28 A
contact rating of auxiliary contacts according to UL	A600 / P600
Short-circuit protection	
design of the fuse link	
• for short-circuit protection of the main circuit — with type of coordination 1 required	gG: 125 A (440 V, 50 kA)
• for short-circuit protection of the auxiliary switch required	gG: 10 A (500 V, 1 kA)
mounting position	+/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface
fastening method	screw and snap-on mounting onto 35 mm and 75 mm DIN rail
height	200 mm
width	85 mm
depth	157 mm
required spacing for grounded parts at the side	12 mm
Connections/ Terminals	
type of electrical connection	
• for main current circuit	screw-type terminals
• for auxiliary and control circuit	screw-type terminals
type of connectable conductor cross-sections for main contacts	
• solid or stranded	1x (4 ... 70 mm²), 2x (4 ... 35 mm²)
connectable conductor cross-section for main contacts	
• solid or stranded	4 ... 35 mm²

finely stranded with pin-end connector	50 ... 4 mm ²
finely stranded without core end processing	4 ... 50 mm ²
connectable conductor cross-section for auxiliary contacts	
solid or stranded	1 ... 4 mm ²
finely stranded with core end processing	1 ... 4 mm ²
finely stranded without core end processing	1 ... 4 mm ²
type of connectable conductor cross-sections	
- for auxiliary contacts — solid or stranded	1x (1 ... 4mm ²), 2x (1 ... 4mm ²)
— finely stranded with core end processing	1x (1 ... 4 mm ²), 2x (1 ... 4 mm ²)
— finely stranded without core end processing	1x (1 ... 4 mm ²), 2x (1 ... 2.5 mm ²)
for AWG cables for auxiliary contacts	14
AWG number as coded connectable conductor cross section for main contacts	10 ... 2
AWG number as coded connectable conductor cross section for auxiliary contacts	14
tightening torque	
for main contacts with screw-type terminals	9 N·m
for auxiliary contacts with screw-type terminals	1.2 N·m
design of the thread of the connection screw	
for main contacts	M10
of the auxiliary and control contacts	M3.5

Safety related data

product function	
mirror contact according to IEC 60947-4-1	No
positively driven operation according to IEC 60947-5-1	No

Electrical Safety

protection class IP on the front according to IEC 60529	IP20
--	------

Approvals Certificates

Environment	General Product Approval	other
--------------------	---------------------------------	--------------

[Environmental Confirmations](#)



[Confirmation](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3MT7006-0JA12-6AP2>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3MT7006-0JA12-6AP2>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3MT7006-0JA12-6AP2&lang=en

Cax online generator

<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3MT7006-0JA12-6AP2>

Characteristic curves

https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP="HAUPT"></mmp_prod_no>

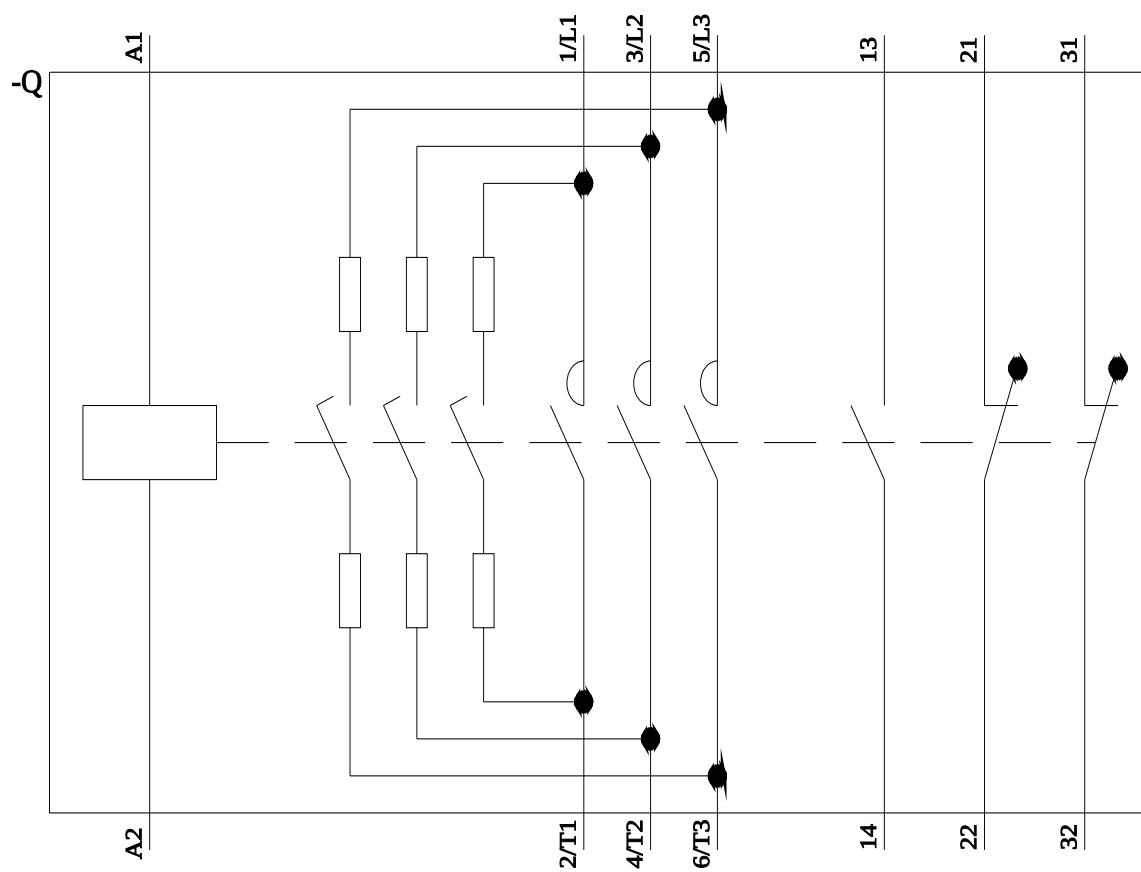

last modified:

4/4/2025 